

# ***ABS BrakeScan™***



## ***Erase Codes Addendum***

## Erase Codes


The **Erase Codes** function deletes DTC data from the ABS control module. **Do not perform this function while the vehicle is in motion.** The Tool must be connected to the vehicle to run this function.

- ✓ Perform **Erase Codes** function **only** after the ABS system has been checked completely and the DTCs have been written down or printed.
- ✓ After servicing the vehicle, erase stored DTCs and verify that the codes have been cleared. If a DTC returns, the problem has not been fixed or other faults are present.
- ✓ The vehicle may need to be driven to conclude that a fault is repaired.


From the **Diagnostic Menu**:

### 1. Select Erase Codes.

- From the **Diagnostic Menu**, press the ▲ **UP** or ▼ **DOWN** arrow key until **Erase Codes** is highlighted.
- Press **ENTER**.

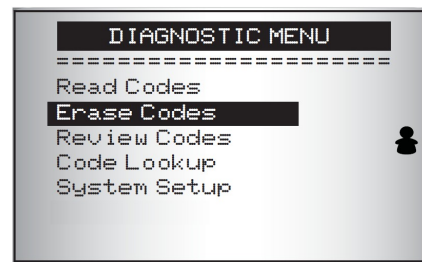


- ✓ If diagnostic results and codes are not to be erased, select **No ▶**.
  - Selecting **No ▶** takes you back to the **Diagnostic Menu**.

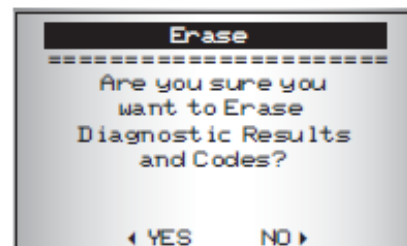

### 2. Erase the diagnostic results and codes.

- Press the ◀ **LEFT** arrow for **Yes**.

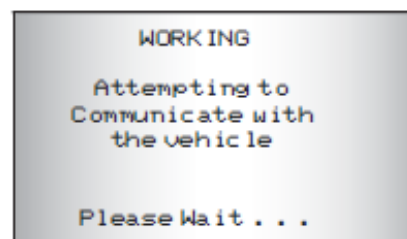

### 3. Observe Command Sent message

### 4. Return to the Diagnostic Menu.

- Press ◀◀ **BACK**.



## Borrar códigos


La función **Borrar códigos** elimina los datos del DTC del módulo de control del ABS. **No realice esta función mientras el vehículo está en movimiento.** La herramienta debe estar conectada al vehículo para ejecutar esta función.

- ✓ Ejecute la función **Borrar Códigos solamente** después de que el sistema ABS se haya comprobado por completo y se hayan escrito o impreso los DTC.
- ✓ Después de dar servicio al vehículo, borre los DTC almacenados y verifique que los códigos se hayan borrado. Si vuelve un DTC, el problema no se ha solucionado o se encontraron otras fallas.
- ✓ Puede ser necesario que el vehículo esté en funcionamiento para concluir que se reparó una falla.

Desde el *Menú de diagnóstico*:


### 1. Seleccione Borrar Códigos.

- Desde el *Menú de diagnóstico*, presione la tecla de dirección **▲ ARRIBA** o **▼ ABAJO** hasta que **Borrar códigos** quede resaltado.
- Pulse **INTRO**.

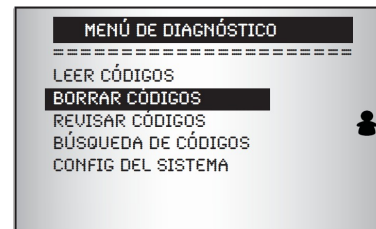


- ✓ Si decide no borrar los resultados de diagnóstico y los códigos, seleccione **No ►**.

- Al seleccionar **No ►** regresa al *Menú de diagnóstico*.

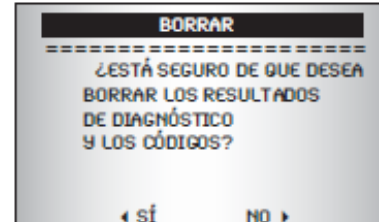

### 2. Borrar los resultados de diagnóstico y los códigos.

- Presione la flecha **◀ IZQUIERDA** para seleccionar **Sí**.

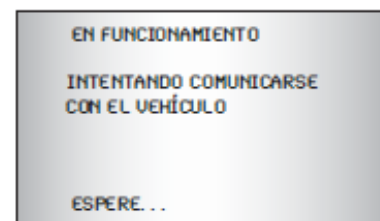

### 3. Observe el mensaje *Comando enviado*.

### 4. Vuelva al Menú de diagnóstico.

- Pulse **◀◀ RETRO**.



© 2010 SPX Corporation  
All Rights Reserved.  
Todos los derechos reservados.

P/N 0002-000-3138